

## SREH Enclosure / Control Panel Heaters

### Product Highlights:

- ✓ Prevents condensation or freezing of electronics located within enclosures and control panels
- ✓ Easy-to-install mounting plate
- ✓ Air sensing thermostat
- ✓ CE (see page A-2 for more information)

**Moisture and Chemical Resistant**


Temperatures up to



450°F (232°C)

### Specifications

- Heating element is laminated between two layers of 15 mil fiberglass reinforced silicone rubber.
- Silicone rubber density of 16.8 oz/yd<sup>2</sup> (570 grams/m<sup>2</sup>) per layer.
- Overall thickness (blanket and bracket) of 1/4" (6mm)
- Exposed temperature range: 32 °F to 450°F (0°C to 232°C)
- Aluminum mounting plate comes with two 7/16" (11mm) holes for mounting.
- Mount either vertically horizontally (optimal control achieved by mounting vertically)
- Operating voltage of 120 VAC.
- 48" (1219mm) TEFLON® extruded leads
- Dielectric strength of over 2000 volts
- Moisture, chemical, and radiation resistant.

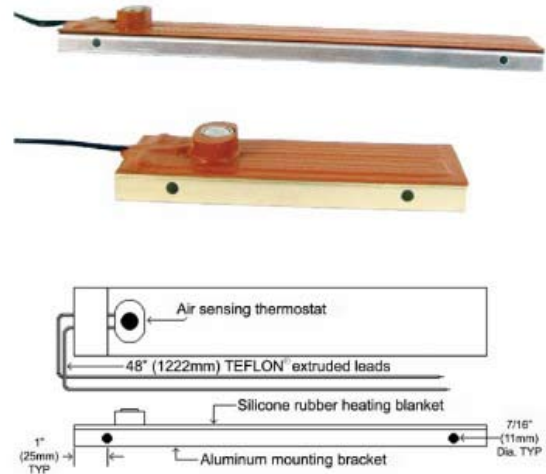

### Ordering Information:

Width in (mm)	Length in (mm)	Total Watts	Thermostat		Part number 120VAC
			Opens	Closes	
2.5 (64)	6 (152)	60	without	thermostat	SREH600
2.5 (64)	6 (152)	60	60°F (15°C)	40°F (4°C)	SREH640
2.5 (64)	6 (152)	60	140°F (60°C)	110°F (43°C)	SREH6110
2.5 (64)	6 (152)	60	180°F (82°C)	150°F (65°C)	SREH6150
2.5 (64)	12 (305)	120	without	thermostat	SREH1200
2.5 (64)	12 (305)	120	60°F (15°C)	40°F (4°C)	SREH1240
2.5 (64)	12 (305)	120	140°F (60°C)	110°F (43°C)	SREH12110
2.5 (64)	12 (305)	120	180°F (82°C)	150°F (65°C)	SREH12150